

CROWN OPTO S0+



ITEM DESCRIPTION

Crown OPTO S0+ is a new solution for uniform illumination of single-sided lightboxes and bigger channel letters with depth ranging from 40 to 90 mm. Due to the new optics, we have used with this module, light is distributed more evenly inside the lightboxes or channel letters. As these modules have a better light distribution pattern, they can be installed with a 170 mm step. For fixing modules in place, adhesive tape is used. To ensure the convenient use of it, we designed the tape with a finger lift edge liner for quick and easy removal of the protective layer. Crown OPTO S0+ comes with L80 50 000 h lifetime and 5 years (24/7) warranty.

APPLICATION

- Single-sided lightboxes and bigger channel letters
- Recommended depth 40 – 90 mm

FEATURES & BENEFITS


- Efficiency up to 128 lm/W
- 170 mm distance between centers of modules
- IP67 protection class
- L80 50, 000 h lifetime
- 5-year 24/7 warranty
- Easy tear finger-lift tape for faster installation



GENERAL SPECIFICATIONS


SUPPLY VOLTAGE	12 VDC
POWER	0.5 W
RECOMMENDED DEPTH	from 40 to 90 mm
CC DISTANCE	170 mm 120 mm
BINNING	3 SDCM
OPERATING TEMPERATURE	-30 °C ~ +50 °C
STORAGE TEMPERATURE	+5°C ~ +70 °C
STORAGE CONDITIONS	Relative humidity <60%
CERTIFICATION	CE and RoHS pending
IP CLASS	IP67
LIFETIME	L80 50,000 h
WARRANTY	5 years (24/7)*

*Warranty is applied only and if storage, mounting and maintenance conditions, stated in the installation guide, are followed.

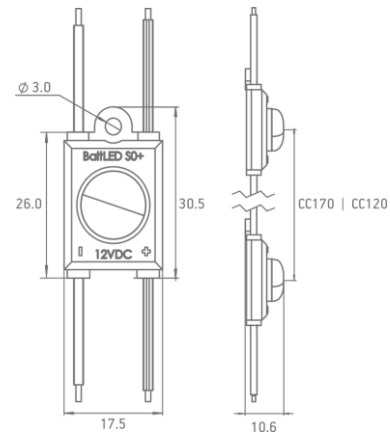

Dimensions are in mm

LIGHT DISTRIBUTION GRAPH

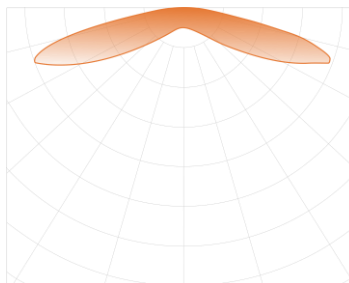

Beam angle: 160°

ORDERING INFORMATION

SKU	CC DISTANCE, MM	POWER, W	LUMEN OUTPUT, LM	COLOUR TEMP.	STATUS
BMOP-SP-LE1A160865E05	170	0.5	63	6500 K	IN STOCK
BMOP-SP-LE1A160865E05CC	120	0.5	63	6500 K	IN STOCK
BMOP-SP-LE1A160840E05	170	0.5	64	4000 K	IN STOCK
BMOP-SP-LE1A160830E05	170	0.5	50	3000 K	IN STOCK
BMOP-SP-LE1A160RE05	170	0.45	20	red	IN STOCK
BMOP-SP-LE1A160GE05	170	0.5	44	green	IN STOCK
BMOP-SP-LE1A160BE05	170	0.5	11	blue	IN STOCK

PACKAGING INFORMATION

CC DISTANCE, MM	CHAIN	BAG	BOX
BMOP-SP-LE1A160865E05	60 pcs (0.4 kg)	120 pcs (0.8 kg)	1440 pcs (10.4 kg)
BMOP-SP-LE1A160865E05CC	80 pcs (0.6 kg)	160 pcs (1.2 kg)	2240 pcs (18.0 kg)
BMOP-SP-LE1A160840E05	60 pcs (0.4 kg)	120 pcs (0.8 kg)	2400 pcs (18.0 kg)
BMOP-SP-LE1A160830E05	60 pcs (0.4 kg)	120 pcs (0.8 kg)	2400 pcs (18.0 kg)
BMOP-SP-LE1A160RE05	60 pcs (0.4 kg)	120 pcs (0.8 kg)	2400 pcs (18.0 kg)
BMOP-SP-LE1A160GE05	60 pcs (0.4 kg)	120 pcs (0.8 kg)	2400 pcs (18.0 kg)
BMOP-SP-LE1A160BE05	60 pcs (0.4 kg)	120 pcs (0.8 kg)	2400 pcs (18.0 kg)