



Letter Face Plate

Letter face flat cut powder coated black

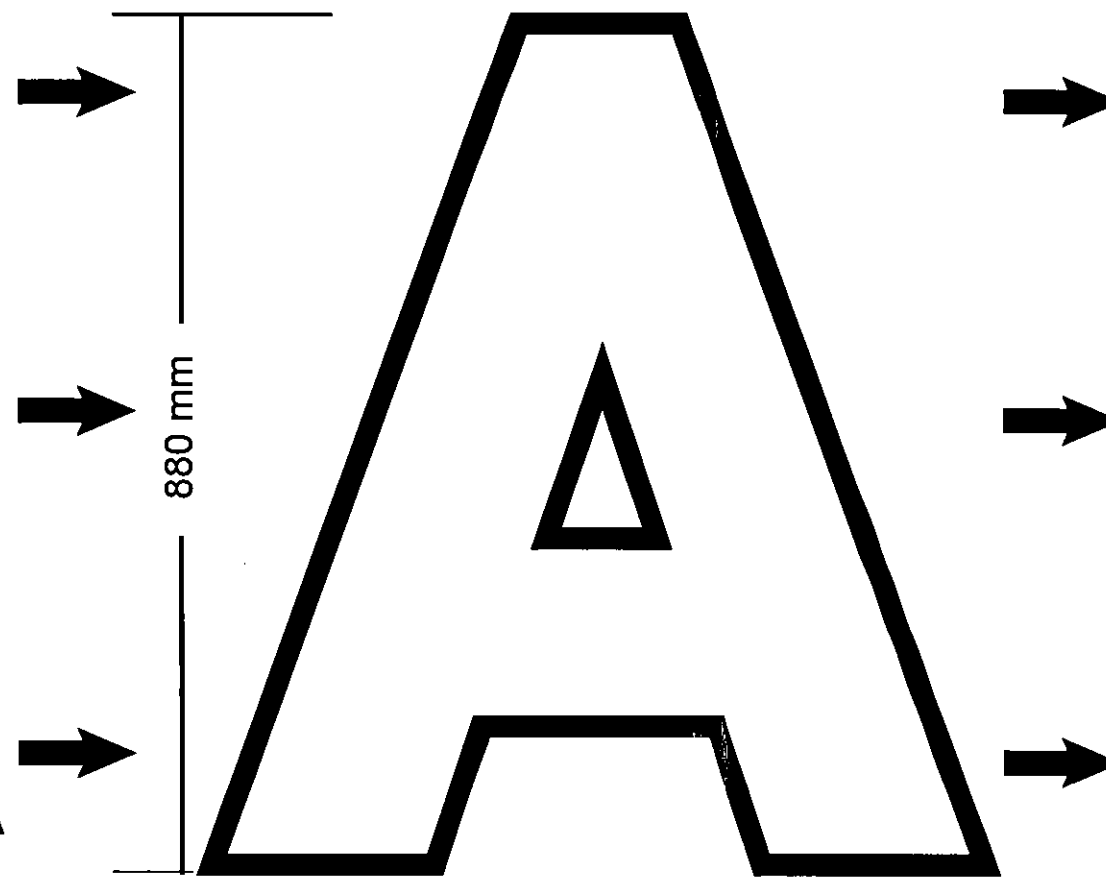

Letter Face


Lighting arrangement

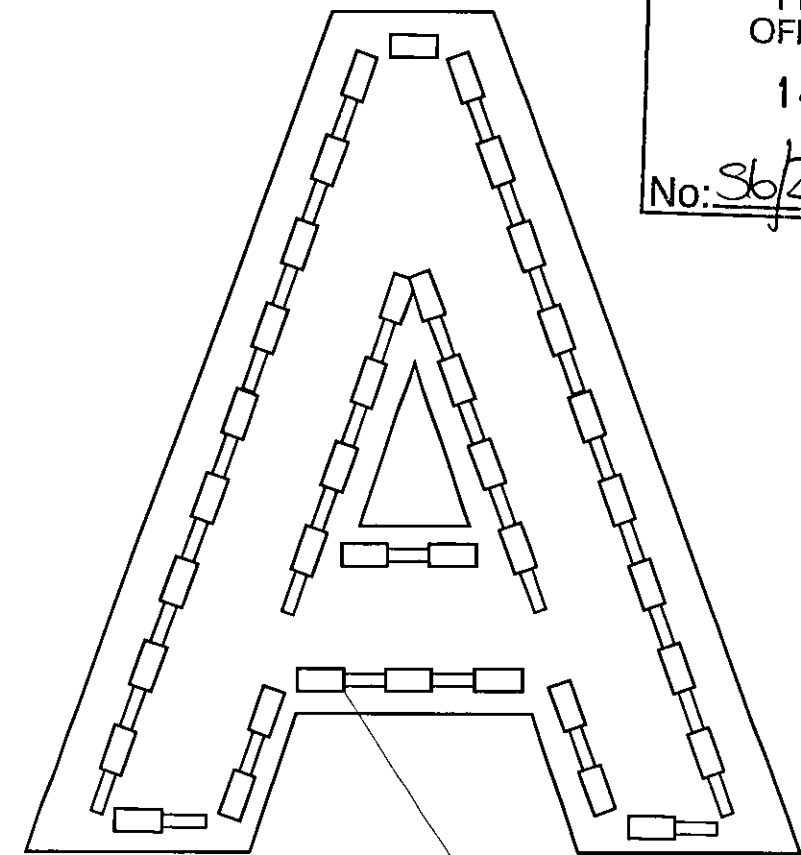

Letter Back

Letter back powder coated black on the outside and white on the inside

Arrangement of led modules within letter these align with apertures in face of letter

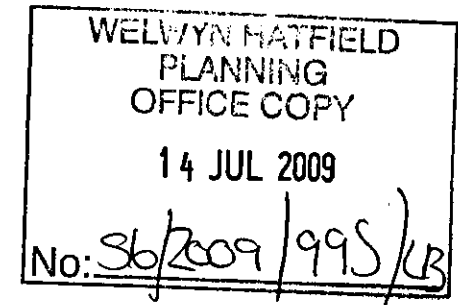

Illumination - Each letter is static illuminated and controlled with both time clock and photocell to operate when dark between the hours of 6.30 am and 11.00pm when the club is open

Lumen Calculation - Each letter fitted with approximately 29 LED modules resulting in a light production of 116 lumens which is then diffused through opal 050 acrylic and constrained within a 17mm keyline around the perimeter of the letter. Therefore approximate light output per letter 47 lumens



Proposed New External Signage
Building Mounted

