


## RAC Low Static Ducted R32

Product Code: CS-Z35UD3EAW

### Low Static Ducted Indoor Unit - Split- R32

#### Notes

- » These units can be installed on R22 pipe works
- » More efficient than ever for improved energy consumption and higher savings
- » Double airflow for better efficiency
- » Powerful mode for quick temperature setting
- » R32 refrigerant gas

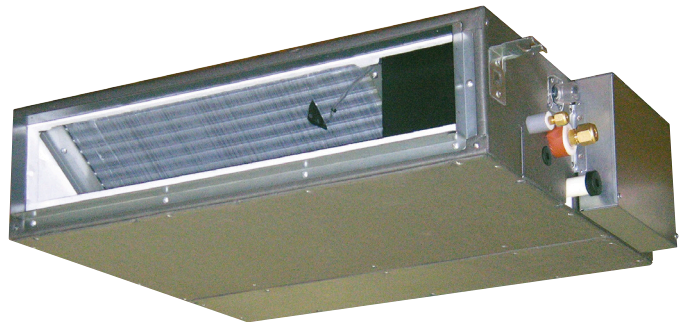

| MODEL NUMBER                   |         | CS-Z35UD3EAW       |
|--------------------------------|---------|--------------------|
| GRILLE                         |         | N/A                |
| Nominal cooling                | kW      | 3.50 (0.85 - 4.00) |
| Nominal heating                | kW      | 4.20 (0.85 - 5.10) |
| Height                         | mm      | 200                |
| Width                          | mm      | 750                |
| Depth                          | mm      | 640                |
| Weight                         | kg      | 19                 |
| Knock out for fresh air intake |         | N/A                |
| Knock out for branch duct      |         | N/A                |
| Indoor unit airflow rate (l-h) | l/s     | 187 - 187          |
| Moisture Removal Volume        | l/h     | 2.0                |
| Static pressure                | pa      | TBC                |
| Spigot Kit                     |         | N/A                |
| Discharge spigot               |         | TBC                |
| Sound pressure level (l-m-h)   | dB(A)   | 24 - 27 - 35       |
| Pipe connection size - gas     | in      | 3/8"               |
| Pipe connection size - liquid  | in      | 1/4"               |
| Refrigerant                    |         | R32                |
| Drain connection               | mm      | TBC                |
| Lift pump?                     |         | TBC                |
| Power supply                   | V-Ph-Hz | From Outdoor       |
| Interconnecting cables         |         | TBC                |
| Suggested fuse size            |         | TBC                |
| Controller included?           |         | Yes - Wired        |

\* exact cooling and heating capacities will depending on connected outdoor unit and system configuration

