


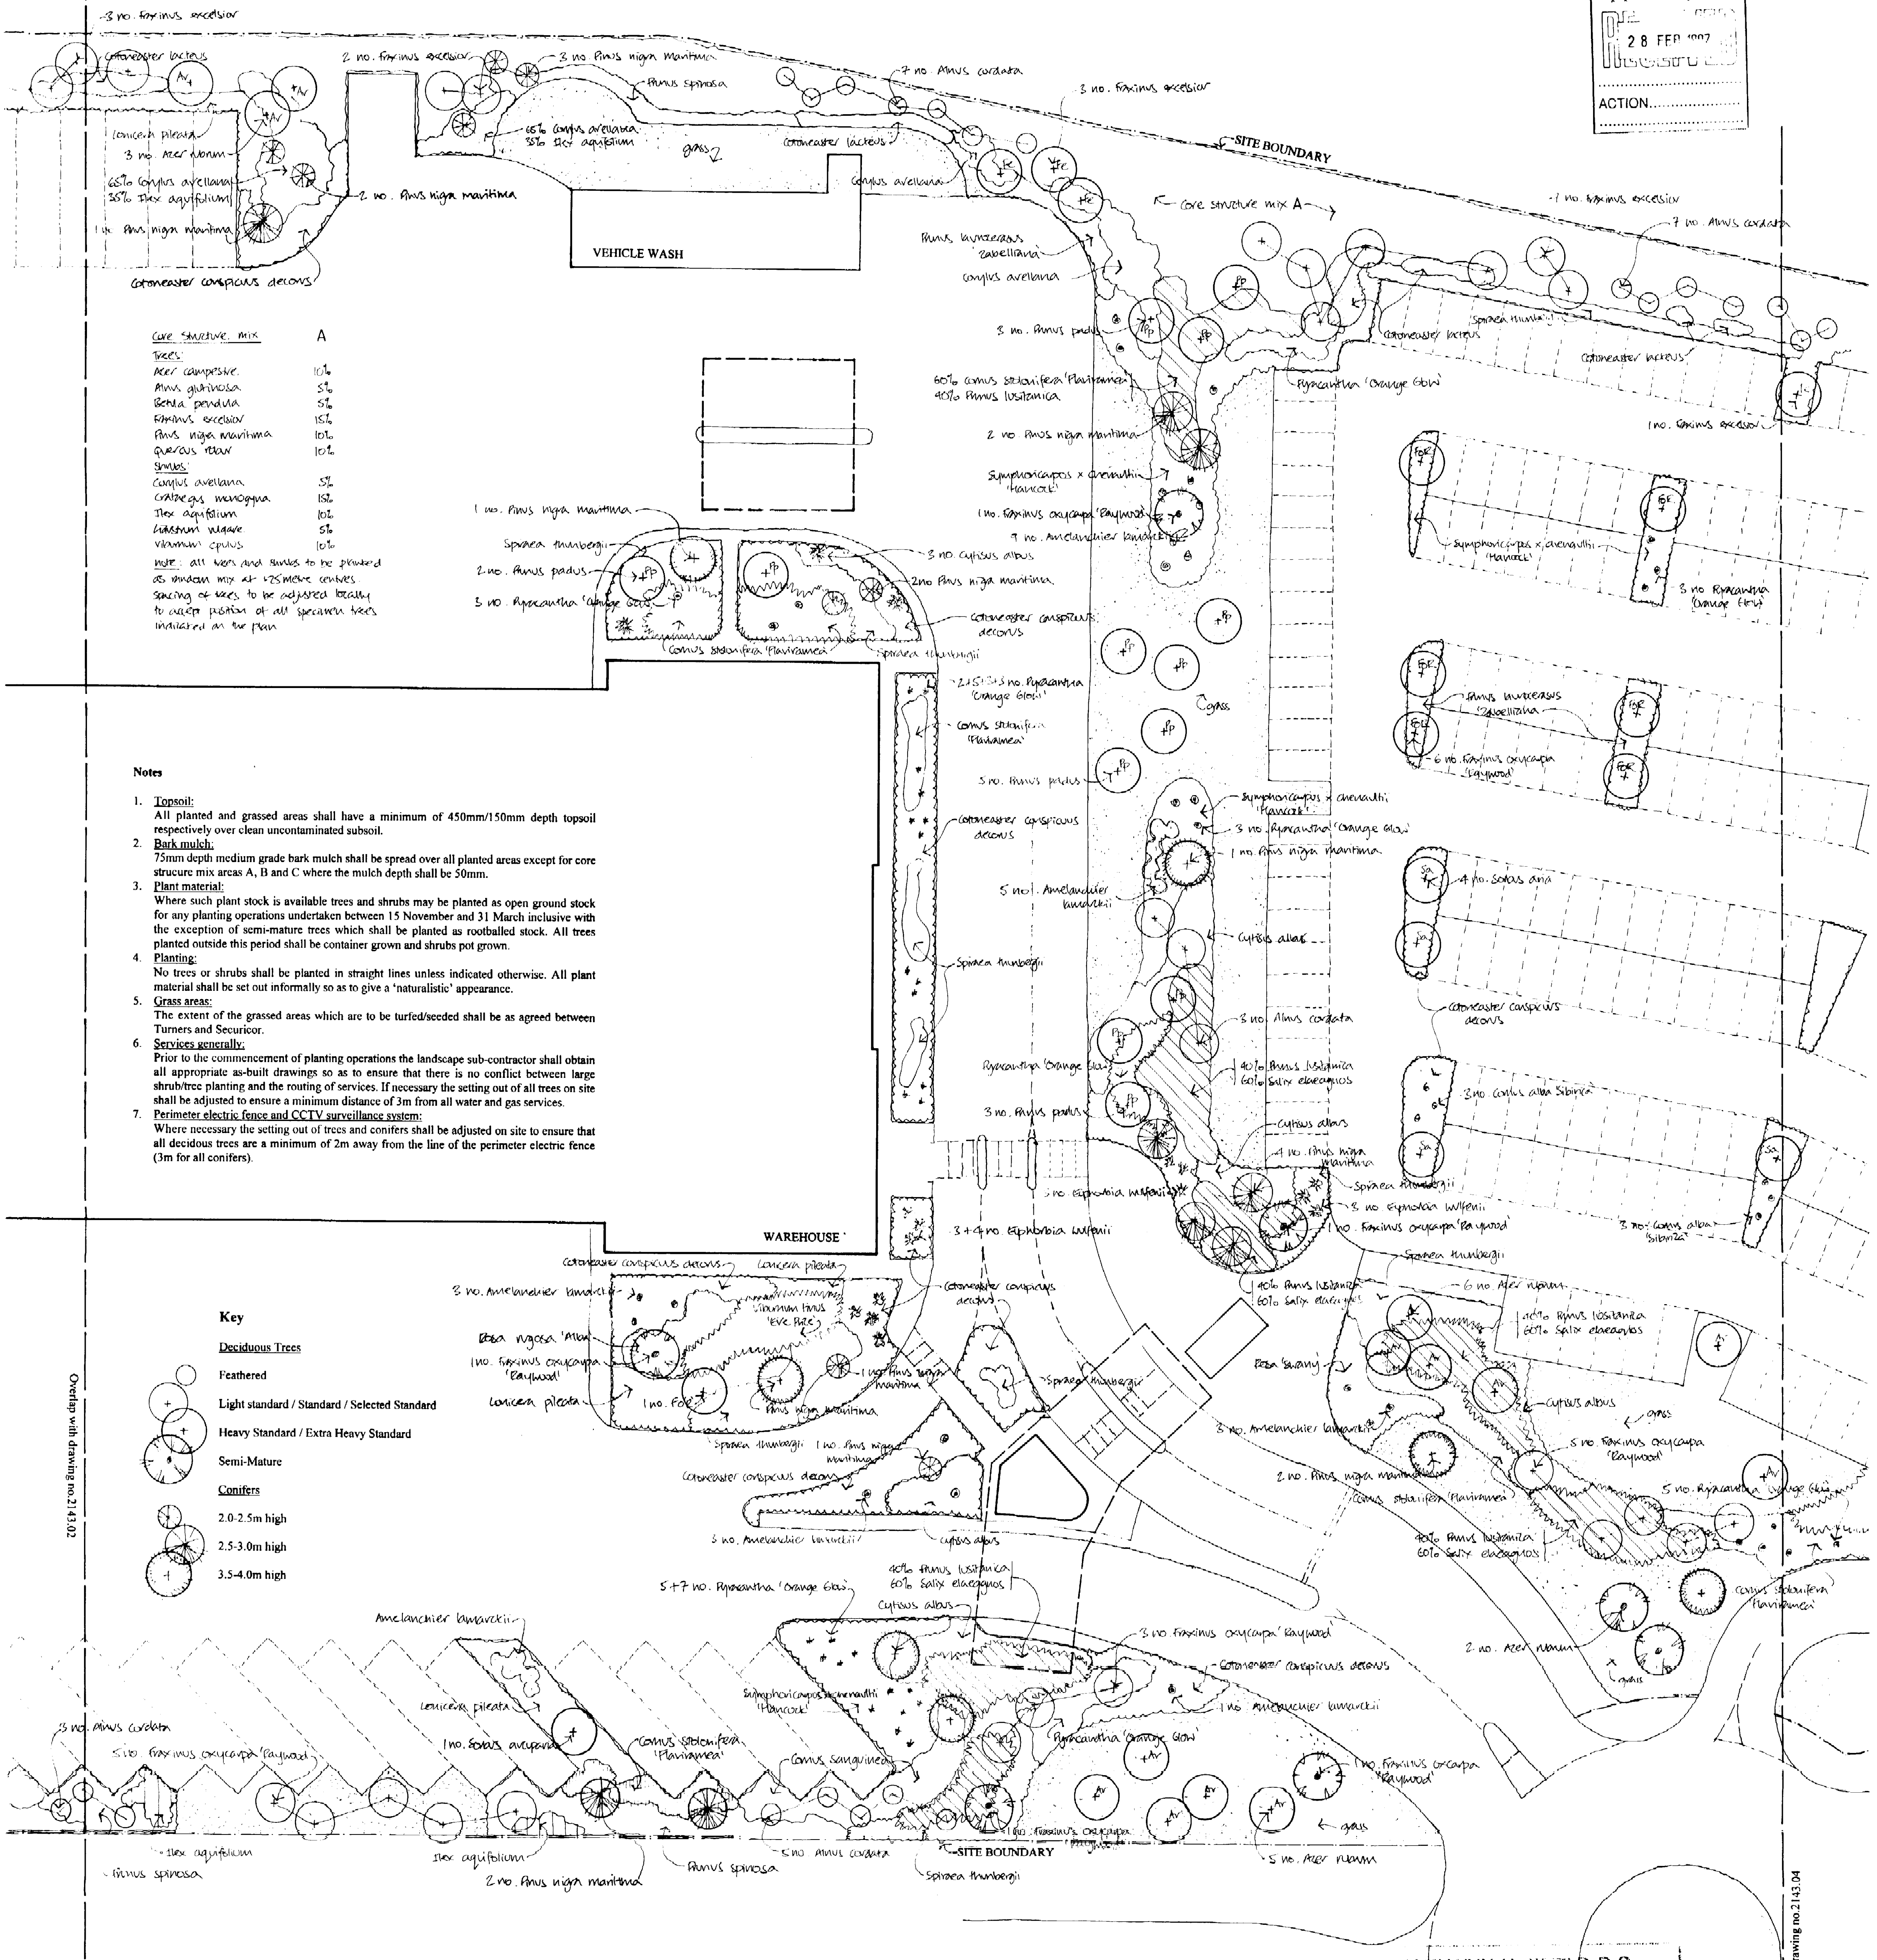

CORE STRUCTURE MIX A	
Trees:	
Acer campestre	10%
Pinus glutinosa	5%
Betula pendula	5%
Fraxinus excelsior	15%
Pinus nigra maritima	10%
Quercus robur	10%
Shrubs:	
Cornus avellana	5%
Crataegus monogyna	15%
Ilex aquifolium	10%
Ligustrum vulgare	5%
Viburnum opulus	10%
NOTE: All trees and shrubs to be planted as standard mix at 125mm centres. Spacing of trees to be adjusted locally to accept position of all specimen trees indicated on the plan.	

- Notes**
- Topsoil:** All planted and grassed areas shall have a minimum of 450mm/150mm depth topsoil respectively over clean uncontaminated subsoil.
 - Bark mulch:** 75mm depth medium grade bark mulch shall be spread over all planted areas except for core structure mix areas A, B and C where the mulch depth shall be 50mm.
 - Plant material:** Where such plant stock is available trees and shrubs may be planted as open ground stock for any planting operations undertaken between 15 November and 31 March inclusive with the exception of semi-mature trees which shall be planted as rootballed stock. All trees planted outside this period shall be container grown and shrubs pot grown.
 - Planting:** No trees or shrubs shall be planted in straight lines unless indicated otherwise. All plant material shall be set out informally so as to give a 'naturalistic' appearance.
 - Grass areas:** The extent of the grassed areas which are to be turfed/seeded shall be as agreed between Turners and Securicor.
 - Services generally:** Prior to the commencement of planting operations the landscape sub-contractor shall obtain all appropriate as-built drawings so as to ensure that there is no conflict between large shrub/tree planting and the routing of services. If necessary the setting out of all trees on site shall be adjusted to ensure a minimum distance of 3m from all water and gas services.
 - Perimeter electric fence and CCTV surveillance system:** Where necessary the setting out of trees and conifers shall be adjusted on site to ensure that all deciduous trees are a minimum of 2m away from the line of the perimeter electric fence (3m for all conifers).

Key	
Deciduous Trees	
Feathered	
Light standard / Standard / Selected Standard	
Heavy Standard / Extra Heavy Standard	
Semi-Mature	
Conifers	
2.0-2.5m high	
2.5-3.0m high	
3.5-4.0m high	

Schedule of plants

Specimen Trees		
Acer rubrum	Semi-mature, 4.5-5.0m high	2 no.
Acer rubrum	hs, 12-14cm girth, 3.5-4.0m high	14 no.
Alnus cordata	std, 8-10cm girth, 2.5-3.0m high	3 no.
Alnus cordata	flhd, 1.8-2.1m high	22 no.
Fraxinus excelsior	hs, 12-14cm girth, 3.5-4.0m high	4 no.
Fraxinus excelsior	std, 8-10cm girth, 2.5-3.0m high	12 no.
Fraxinus excelsior	Semi-mature, 4.5-5.0m high	5 no.
Fraxinus excelsior	hs, 12-14cm girth, 3.5-4.0m high	6 no.
Fraxinus excelsior	std, 8-10cm girth, 2.5-3.0m high	13 no.
Pinus nigra maritima	3.5-4.0m high	7 no.
Pinus nigra maritima	2.5-3.0m high	10 no.
Pinus nigra maritima	2.0-2.5m high	10 no.
Prunus padus	ehs, 14-16cm girth, 4.5-5.0m high	13 no.
Sorbus aria	hs, 12-14cm girth, 3.5-4.0m high	4 no.
Sorbus aucuparia	ehs, 14-16cm girth, 4.5-5.0m high	1 no.

Trees		
Acer campestre	whip, 1200-1500mm high	1.25m ctrs
Alnus glutinosa	whip, 1200-1500mm high	1.25m ctrs
Betula pendula	transplant, 900-1200mm high	1.25m ctrs
Fraxinus excelsior	whip, 1200-1500mm high	1.25m ctrs
Pinus nigra maritima	450-600mm high	1.25m ctrs
Quercus robur	600-900mm high	1.25m ctrs
Shrubs		
Amelanchier lamarckii	600-900mm high	specimens
Cornus alba 'Sibirica'	450-600mm high	specimens
Cornus sanguinea	600-900mm high	2 per m ²
Cornus stolonifera 'Flaviramea'	450-600mm high	3 per m ²
Corylus avellana	450-600mm high	1.25m ctrs
Cotoneaster conspicuus decorus	300-450mm high	4 per m ²
Cotoneaster latus	450-600mm high	2 per m ²
Crataegus monogyna	450-600mm high	1.25m ctrs

Cytisus albus	300-450mm high	3 per m ²
Ilex aquifolium	450-600mm high	1.25m ctrs, 2 per m ²
Ligustrum vulgare	600-900mm high	1.25m ctrs
Lonicera pileata	300-450mm high	3 per m ²
Prunus laurocerasus		
'Zabelliana'	300-450mm high	3 per m ²
Prunus lusitanica	300-450mm high	2 per m ²
Prunus spinosa	450-600mm high	2 per m ²
Pyracantha 'Orange Glow'	450-600mm high	2 per m ²
Rosa rugosa 'Alba'	450-600mm high	3 per m ²
Rosa 'Swany'	200-300mm high	4 per m ²
Salix elaeagnos	600-900mm high	2 per m ²
Spiraea thunbergii	300-450mm high	3 per m ²
Symphoricarpos x chenaultii	300-450mm high	2 per m ²
'Hancock'		
Viburnum opulus	600-900mm high	1.25m ctrs, 2 per m ²
Herbaceous		
Euphorbia wulfenii	2 litre pot	specimens

- Revision A: Amendments/additions to notes, bulb planting omitted, planting to roundabout omitted, changes to vehicle entrance area and main entrance to warehouse
- Revision B: Alterations to specimen trees, layout approach to vehicle wash and planting amended, notes 2 and 7 amended
- Dec 1996
- Jan 1997

EPCAD CONSULTANTS

Environmental Planning Coordination and Design
Woolstone Centre • 6 Mill Lane • Woolstone • Milton Keynes • MK15 0AJ
Tel: 01908 231125 • Fax: 01908 672611

Project: SECURICOR DISTRIBUTION CENTRE, HATFIELD

Title: PLANTING PLAN (Sheet 3 of 4)

Scale: 1:250 Date: OCT 1996 Drawn: WRW/RL

Drawing No: 2143.03 Revision: B

Copyright Epcad