

36 Parking reminders - single sided


**Action** Whole sign to be replaced

Quantity existing 3 panels in 3 locations                      3 panels in 3 locations



**Size**  
Panel 450mm (w) x 700mm (h)

**Materials & colour**  
Aluminium panels painted Waitrose grey (RAL 7015)with cut vinyl text and graphic applied to face. 20mm radiused corners

**Details**  
Existing sign to be removed, area made good and new sign installed in the same location at 2300mm AFFL to bottom of panel.

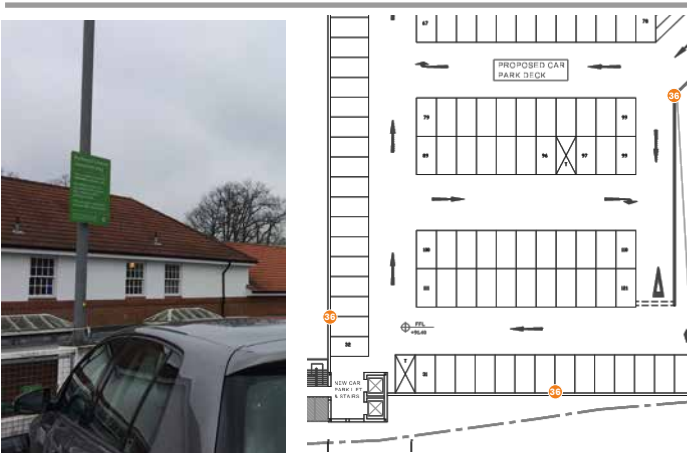

Existing location



37 Lifts and stairs to Waitrose

**Action** Whole sign to be replaced

Quantity existing 1                      Proposed 1

**Size**  
**Exact size to be confirmed**

**Materials & colour**  
Aluminium panels painted green PMS370C with white cut vinyl text and graphic applied to face. No visible fixings from below.


**Details**  
Existing sign to be removed, area made good and new sign installed in the same location  
**Sign contractor to confirm exact size.**



Existing location

Lifts and stairs to Waitrose

Lifts and stairs to Waitrose



38 Parking information - full T&Cs

**Action** Whole sign to be replaced

Quantity existing 1                      Proposed 1


**Size**  
Panel 602mm (w) x 935mm (h) x 40mm (d)

**Materials & colour**  
Aluminium panels painted Waitrose grey (RAL 7015) with cut vinyl text and graphic applied to face. Full terms and conditions text and graphic to be printed onto optically clear and applied to bottom of portion of panel. White vinyl keyline to be applied over clear digiprint to hide join.

**Details**  
Existing sign to be removed, area made good and new sign installed in the same location 1750mm AFFL to top of panel.



Existing location



39 Car park directional

**Action** Whole sign to be replaced

Quantity existing 1                      Proposed 1

**Size**  
Overall 1200mm (w) x 250mm (h) x 5mm (d)

**Materials & colour**  
5mm aluminium panel with 5mm radiused corners. Panels to be powder coated white - 40% gloss and with coloured lozenge and RAL 7015 cut vinyl text and graphics applied to face. Mounted on bulkhead.

**Details**  
Existing sign to be removed, area made good and new sign installed in the same location.



Existing location

