

5 Customer entrance directional

Action New installation

Quantity existing 0 Proposed 1

Size
Panel 602mm (w) x 935mm (h) x 40mm (d)

Materials & colour
Aluminium panel painted Waitrose green PMS370C and grey (RAL 7015) with white cut vinyl text and graphic applied to face.

Details
Installed at 1750mm AFFL to top of panel onto brickwork 150mm from the edge of the wall.



Existing location

7 ANPR entrance sign

Action New installation

Quantity existing 0 Proposed 1

Size
Overall 700mm (w) x 2000mm (h) x 80mm (d)
Panel 602mm (w) x 935mm (h)

Materials & colour
Aluminium panels painted Waitrose grey (RAL 7015) with white cut vinyl text and graphic applied to face. Stainless steel supports.

Details
Installed at 2000mm AFFL to top of panel into soft earth. Sign is to be clearly visible to vehicles entering the car park.



Existing location

13 No pedestrian access - DFT

Action New installation

Quantity existing 0 Proposed 3

Size
Panel 250mm (w) x 250mm (h)

Materials & colour
Standard off the self DFT sign to be used.

Details
Installed on columns 2000mm to top of panel AFFL



Existing location

21 Customer entrance directional


Action New installation

Quantity existing 0 Proposed 1

Size
Panel 602mm (w) x 935mm (h) x 40mm (d)

Materials & colour
Aluminium panel painted Waitrose green PMS370C and grey (RAL 7015) with cut vinyl graphic applied to face.

Details
Installed at 1750mm AFFL to top of panel onto brickwork 150mm from the edge of the wall.

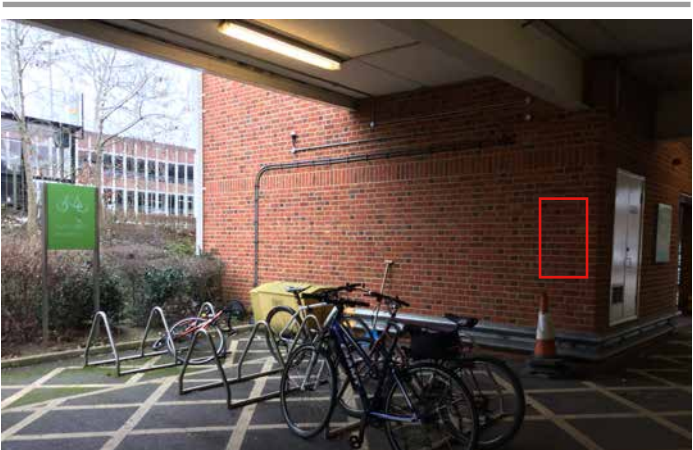

Existing location

