

**Protective Fencing**  
**Tree Protection Area**  
**KEEP OUT**  
**Do not move this fence**

**TOWN & COUNTRY PLANNING ACT 1990**  
**TREES ENCLOSED BY THIS FENCE ARE PROTECTED BY PLANNING CONDITIONS AND ARE THE SUBJECT OF A TREE PRESERVATION ORDER. CONTRAVENTION OF A TREE PRESERVATION ORDER MAY LEAD TO CRIMINAL PROSECUTION.**

**ARBTECH**

**Utility apparatus**  
 Underground utility apparatus  
 Mechanical trenching for the installation of underground apparatus and drainage severs any roots present and can change the local hydrology in a way that adversely affects the health of the tree. For this reason, particular care should be taken in the route and methods of installation of all underground apparatus. Wherever possible, apparatus should be routed outside of RPA's. Where this is not possible, it is preferable to keep apparatus together in common ducts. All inspection chambers should be sited outside of the RPA's.


**Arboricultural Supervision**  
 The arboricultural consultant will be required to attend site to directly supervise all demolition and construction works that have to be undertaken within the root protection areas. This will include:  
 1. Pre-commencement site meeting.  
 2. Location of protective measures.  
 3. Any excavations within or adjacent to RPA's, including foundations, hard surfacing or underground services (if non-excavative RPA).  
 4. Arboricultural sign off and removal of protective measures.

**Arboricultural Method Statement**  
 Please refer to Arbotec Consulting Ltd. Tree Schedule and Arboricultural Method Statement, for full details on all surveyed trees and how all aspects of the development maybe implemented without detriment to retained trees.



**Decomposition of planting pits.**  
 Due to the close proximity of the new development to the proposed planting positions it is not practically possible to physically protect these areas; as such they are to be excavated to a minimum of three times the depth of the root ball, and to the width as identified by the 'decomposition' hatching and then refilled with a clean soil suitable for tree planting.  
 If a specifically designed planting pit is proposed to include the use of a crated system to allow roots to be grown unimpeded beneath the new hard standing decomposition will not be required.

**Decomposition of planting pits.**  
 Due to the close proximity of the new development to the proposed planting positions it is not practically possible to physically protect these areas; as such they are to be excavated to a minimum of three times the depth of the root ball, and to the width as identified by the 'decomposition' hatching and then refilled with a clean soil suitable for tree planting.  
 If a specifically designed planting pit is proposed to include the use of a crated system to allow roots to be grown unimpeded beneath the new hard standing decomposition will not be required.

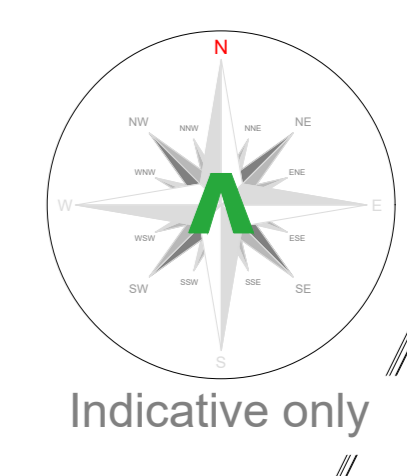

Tree Work Schedule			
No.	Species	Works	Category
1	Line	Fell to ground level; remove stump	B <sub>0</sub>
2	Line	Fell to ground level; remove stump	B <sub>0</sub>
3	Line	Fell to ground level; remove stump	B <sub>0</sub>
4	Line	Fell to ground level; remove stump	B <sub>0</sub>
5	Line	Fell to ground level; remove stump	B <sub>0</sub>
6	Coronaria pine	Fell to ground level; remove stump	B <sub>0</sub>
7	Coronaria pine	Fell to ground level; remove stump	B <sub>0</sub>
8	Coronaria pine	Fell to ground level; remove stump	C <sub>0</sub>
9	Coronaria pine	Fell to ground level; remove stump	C <sub>0</sub>
10	Line	Fell to ground level; remove stump	C <sub>0</sub>
11	Line	Fell to ground level; remove stump	U
12	Line	Fell to ground level; remove stump	B <sub>0</sub>
13	Line	Fell to ground level; remove stump	B <sub>0</sub>
14	Line	Fell to ground level; remove stump	B <sub>0</sub>
15	Line	Fell to ground level; remove stump	B <sub>0</sub>
16	Line	Fell to ground level; remove stump	B <sub>0</sub>
17	Line	Fell to ground level; remove stump	B <sub>0</sub>
18	Wild cherry	Fell to ground level; remove stump	B <sub>0</sub>
19	Wild cherry	Fell to ground level; remove stump	C <sub>0</sub>
20	Wild cherry	Fell to ground level; remove stump	C <sub>0</sub>
21	Wild cherry	Fell to ground level; remove stump	C <sub>0</sub>
22	Wild cherry	Fell to ground level; remove stump	C <sub>0</sub>
23	Wild cherry	Fell to ground level; remove stump	C <sub>0</sub>
24	Wild cherry	Fell to ground level; remove stump	C <sub>0</sub>
25	Wild cherry	Fell to ground level; remove stump	C <sub>0</sub>
26	Wild cherry	Fell to ground level; remove stump	C <sub>0</sub>
27	Wild cherry	Fell to ground level; remove stump	C <sub>0</sub>
28	Wild cherry	Fell to ground level; remove stump	C <sub>0</sub>
29	Wild cherry	Fell to ground level; remove stump	C <sub>0</sub>
30	Wild cherry	Fell to ground level; remove stump	C <sub>0</sub>
31	Wild cherry	Fell to ground level; remove stump	C <sub>0</sub>
32	Wild cherry	Fell to ground level; remove stump	C <sub>0</sub>
33	Wild cherry	Fell to ground level; remove stump	C <sub>0</sub>

All tree work is to be undertaken in accordance with British Standard BS 5838:2010 Tree work - Recommendations.  
 All stumps are to be removed and the site is to be left as found. Care is to be taken of the ground around retained trees to make sure that it does not become compacted as a result of tree surgery operations. No equipment or vehicles such as timber lorries, tractors, excavators or cranes shall be parked or driven beneath the crown of any retained trees, to prevent subsequent compaction and root death.

**ARBTECH**  
 Unit 3, Well House Barns, Chester, CH4 0DH  
 https://arbttech.co.uk, 01244 661170

**Project:**  
 Plot 4100, Gypsy Moth Avenue, Hatfield Business Park, Hatfield, AL10 9SN.

**Client:**  
 Cambria Automobiles Property Ltd.

**Drawing:**  
 Tree Protection Plan

**Based on:**  
 3280 / 030 K

**Drawing No:**  
 Arbttech TPP 01

**Date:**  
 Jan 2018

**Scale:**  
 1:250 @ A0

**Drawn:**  
 MGM

**Key:**  
 Tree No.: 12  
 Tree Categories: Trunk:   
 RPA's: Category 'U' trees: Category 'W' trees:   
 Category 'U' trees: Trees to be removed: Protective fencing:

All dimensions shown are based on the ground shown on this drawing and the condition of the ground shown on this drawing. Arbotec Consulting Ltd. does not accept responsibility for any damage to trees or structures caused by the ground shown on this drawing. Arbotec Consulting Ltd. cannot be held responsible for any damage to trees or structures caused by the ground shown on this drawing. The client shall be responsible for the condition of the ground shown on this drawing. The client shall be responsible for the condition of the ground shown on this drawing. The client shall be responsible for the condition of the ground shown on this drawing.