




The Portchester-Clear 15W is a classic and stylish IP65 rated vandal resistant circular LED bulkhead.

Manufactured from die-cast aluminium and fitted with a strong UV stabilised polycarbonate lens, the Portchester remains robust whilst offering a subtle diffused light.

Options include Dali, Microwave Sensor and Emergency.

Portchester Clear 15W - LED Bulkhead

Bulkhead Lighting

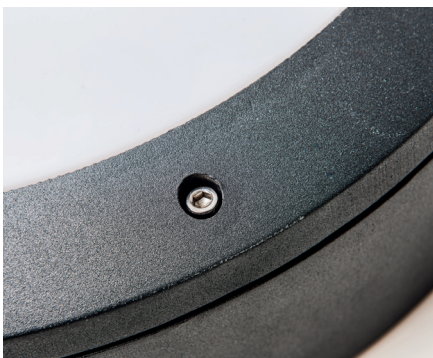

Features


- LED rating 1,782lm (4000K & 6000K).
- LED rating 1,508lm (3000K).
- Luminaire flux 1,426lm (4000K & 6000K).
- Luminaire flux 1,206lm (3000K).
- 3000K (WW), 4000K (NW) and 6000K (CW) colour temperature options.
- -20 to +40°C operating temperature (Emergency 0 to +40°C).
- Long life span > 65,000hrs.
- Osram LED and Osram Driver.
- Non-hooded cover for maximum light output.
- Standard weight: 3.4Kg
- UV stabilised polycarbonate lens for subtle diffused lighting.
- Tamper proof fixings for increased vandal resistance.
- Die-cast aluminium body and strong UV stabilised polycarbonate lens.

Applications

- Hospitals
- Car Parks
- Schools
- Hotels
- Walkways
- Stairwells

www.gemmalighting.com

0800 999 5201

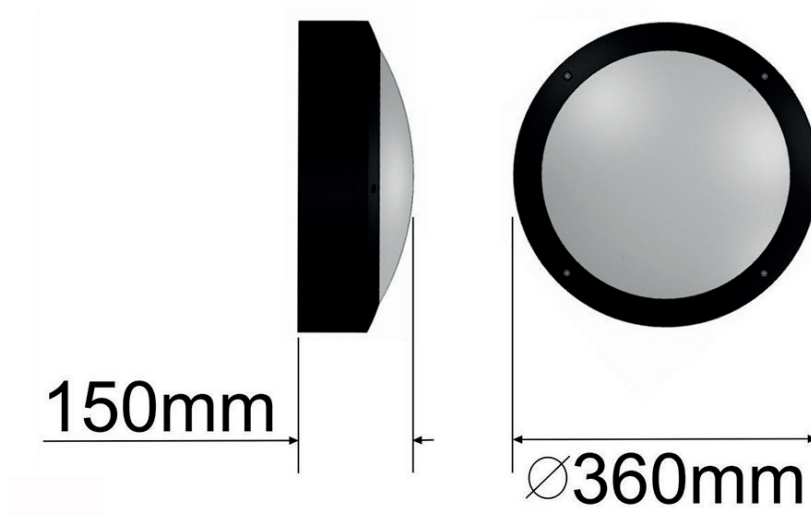

Specifications

Portchester Clear 15W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	Colour Name	CCT (K)	CRI	Voltage	Driver Current (mA)	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Face
Standard - Black														
PC15-A3C-00B	Portchester-Clear-15W-LED-AC-6K-Std-Black	LED	1,782	15	CW	6K	Ra>70	220-240	350	1,426	95	3.4	Black	Clear
PC15-A3N-00B	Portchester-Clear-15W-LED-AC-4K-Std-Black	LED	1,782	15	NW	4K	Ra>70	220-240	350	1,426	95	3.4	Black	Clear
PC15-A3W-00B	Portchester-Clear-15W-LED-AC-3K-Std-Black	LED	1,508	15	WW	3K	Ra>80	220-240	350	1,206	80	3.4	Black	Clear
Standard- Grey														
PC15-A3C-00G	Portchester-Clear-15W-LED-AC-6K-Std-Grey	LED	1,782	15	CW	6K	Ra>70	220-240	350	1,426	95	3.4	Grey	Clear
PC15-A3N-00G	Portchester-Clear-15W-LED-AC-4K-Std-Grey	LED	1,782	15	NW	4K	Ra>70	220-240	350	1,426	95	3.4	Grey	Clear
PC15-A3W-00G	Portchester-Clear-15W-LED-AC-3K-Std-Grey	LED	1,508	15	WW	3K	Ra>80	220-240	350	1,206	80	3.4	Grey	Clear
Standard- Black - Emergency														
PC15-A3C-01B	Portchester-Clear-15W-LED-AC-6K-Std-E3-Black	LED	1,782	15	CW	6K	Ra>70	220-240	350	1,426	95	3.9	Black	Clear
PC15-A3N-01B	Portchester-Clear-15W-LED-AC-4K-Std-E3-Black	LED	1,782	15	NW	4K	Ra>70	220-240	350	1,426	95	3.9	Black	Clear
PC15-A3W-01B	Portchester-Clear-15W-LED-AC-3K-Std-E3-Black	LED	1,508	15	WW	3K	Ra>80	220-240	350	1,206	80	3.9	Black	Clear
Standard- Grey - Emergency														
PC15-A3C-01G	Portchester-Clear-15W-LED-AC-6K-Std-E3-Grey	LED	1,782	15	CW	6K	Ra>70	220-240	350	1,426	95	3.9	Grey	Clear
PC15-A3N-01G	Portchester-Clear-15W-LED-AC-4K-Std-E3-Grey	LED	1,782	15	NW	4K	Ra>70	220-240	350	1,426	95	3.9	Grey	Clear
PC15-A3W-01G	Portchester-Clear-15W-LED-AC-3K-Std-E3-Grey	LED	1,508	15	WW	3K	Ra>80	220-240	350	1,206	80	3.9	Grey	Clear
Standard- Black - Microwave														
PC15-A3C-02B	Portchester-Clear-15W-LED-AC-6K-Std-MW-Black	LED	1,782	15	CW	6K	Ra>70	220-240	350	1,426	95	3.6	Black	Clear
PC15-A3N-02B	Portchester-Clear-15W-LED-AC-4K-Std-MW-Black	LED	1,782	15	NW	4K	Ra>70	220-240	350	1,426	95	3.6	Black	Clear
PC15-A3W-02B	Portchester-Clear-15W-LED-AC-3K-Std-MW-Black	LED	1,508	15	WW	3K	Ra>80	220-240	350	1,206	80	3.6	Black	Clear

www.gemmalighting.com

0800 999 5201



Specifications

Portchester Clear 15W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	Colour Name	CCT(K)	CRI	Voltage	Driver Current (mA)	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Face
Standard- Grey- Microwave														
PC15-A3C-02G	Portchester-Clear-15W-LED-AC-6K-Std-MW-Grey	LED	1,782	15	CW	6K	Ra>70	220-240	350	1,426	95	3.6	Grey	Clear
PC15-A3N-02G	Portchester-Clear-15W-LED-AC-4K-Std-MW-Grey	LED	1,782	15	NW	4K	Ra>70	220-240	350	1,426	95	3.6	Grey	Clear
PC15-A3W-02G	Portchester-Clear-15W-LED-AC-3K-Std-MW-Grey	LED	1,508	15	WW	3K	Ra>80	220-240	350	1,206	80	3.6	Grey	Clear
Standard - Black- Microwave- Emergency														
PC15-A3C-03B	Portchester-Clear-15W-LED-AC-6K-Std-MW-E3-Black	LED	1,782	15	CW	6K	Ra>70	220-240	350	1,426	95	4.1	Black	Clear
PC15-A3N-03B	Portchester-Clear-15W-LED-AC-4K-Std-MW-E3-Black	LED	1,782	15	NW	4K	Ra>70	220-240	350	1,426	95	4.1	Black	Clear
PC15-A3W-03B	Portchester-Clear-15W-LED-AC-3K-Std-MW-E3-Black	LED	1,508	15	WW	3K	Ra>80	220-240	350	1,206	80	4.1	Black	Clear
Standard - Grey - Microwave - Emergency														
PC15-A3C-03G	Portchester-Clear-15W-LED-AC-6K-Std-MW-E3-Grey	LED	1,782	15	CW	6K	Ra>70	220-240	350	1,426	95	4.1	Grey	Clear
PC15-A3N-03G	Portchester-Clear-15W-LED-AC-4K-Std-MW-E3-Grey	LED	1,782	15	NW	4K	Ra>70	220-240	350	1,426	95	4.1	Grey	Clear
PC15-A3W-03G	Portchester-Clear-15W-LED-AC-3K-Std-MW-E3-Grey	LED	1,508	15	WW	3K	Ra>80	220-240	350	1,206	80	4.1	Grey	Clear
Dali - Black														
PC15-A3C-20B	Portchester-Clear-15W-LED-AC-6K-Dali-Black	LED	1,782	15	CW	6K	Ra>70	220-240	350	1,426	95	3.4	Black	Clear
PC15-A3N-20B	Portchester-Clear-15W-LED-AC-4K-Dali-Black	LED	1,782	15	NW	4K	Ra>70	220-240	350	1,426	95	3.4	Black	Clear
PC15-A3W-20B	Portchester-Clear-15W-LED-AC-3K-Dali-Black	LED	1,508	15	WW	3K	Ra>80	220-240	350	1,206	80	3.4	Black	Clear
Dali - Grey														
PC15-A3C-20G	Portchester-Clear-15W-LED-AC-6K-Dali-Grey	LED	1,782	15	CW	6K	Ra>70	220-240	350	1,426	95	3.4	Grey	Clear
PC15-A3N-20G	Portchester-Clear-15W-LED-AC-4K-Dali-Grey	LED	1,782	15	NW	4K	Ra>70	220-240	350	1,426	95	3.4	Grey	Clear
PC15-A3W-20G	Portchester-Clear-15W-LED-AC-3K-Dali-Grey	LED	1,508	15	WW	3K	Ra>80	220-240	350	1,206	80	3.4	Grey	Clear
Dali - Black - Emergency														
PC15-A3C-21B	Portchester-Clear-15W-LED-AC-6K-Dali-E3-Black	LED	1,782	15	CW	6K	Ra>70	220-240	350	1,426	95	3.9	Black	Clear
PC15-A3N-21B	Portchester-Clear-15W-LED-AC-4K-Dali-E3-Black	LED	1,782	15	NW	4K	Ra>70	220-240	350	1,426	95	3.9	Black	Clear
PC15-A3W-21B	Portchester-Clear-15W-LED-AC-3K-Dali-E3-Black	LED	1,508	15	WW	3K	Ra>80	220-240	350	1,206	80	3.9	Black	Clear
Dali - Grey- Emergency														
PC15-A3C-21G	Portchester-Clear-15W-LED-AC-6K-Dali-E3-Grey	LED	1,782	15	CW	6K	Ra>70	220-240	350	1,426	95	3.9	Grey	Clear
PC15-A3N-21G	Portchester-Clear-15W-LED-AC-4K-Dali-E3-Grey	LED	1,782	15	NW	4K	Ra>70	220-240	350	1,426	95	3.9	Grey	Clear
PC15-A3W-21G	Portchester-Clear-15W-LED-AC-3K-Dali-E3-Grey	LED	1,508	15	WW	3K	Ra>80	220-240	350	1,206	80	3.9	Grey	Clear
Dali - Black - Microwave														
PC15-A3C-22B	Portchester-Clear-15W-LED-AC-6K-Dali-MW-Black	LED	1,782	15	CW	6K	Ra>70	220-240	350	1,426	95	3.6	Black	Clear
PC15-A3N-22B	Portchester-Clear-15W-LED-AC-4K-Dali-MW-Black	LED	1,782	15	NW	4K	Ra>70	220-240	350	1,426	95	3.6	Black	Clear
PC15-A3W-22B	Portchester-Clear-15W-LED-AC-3K-Dali-MW-Black	LED	1,508	15	WW	3K	Ra>80	220-240	350	1,206	80	3.6	Black	Clear
Dali - Grey - Microwave														
PC15-A3C-22G	Portchester-Clear-15W-LED-AC-6K-Dali-MW-Grey	LED	1,782	15	CW	6K	Ra>70	220-240	350	1,426	95	3.6	Grey	Clear
PC15-A3N-22G	Portchester-Clear-15W-LED-AC-4K-Dali-MW-Grey	LED	1,782	15	NW	4K	Ra>70	220-240	350	1,426	95	3.6	Grey	Clear
PC15-A3W-22G	Portchester-Clear-15W-LED-AC-3K-Dali-MW-Grey	LED	1,508	15	WW	3K	Ra>80	220-240	350	1,206	80	3.6	Grey	Clear

www.gemmalighting.com

0800 999 5201



Specifications

Portchester Clear 15W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	Colour Name	CCT(K)	CRI	Voltage	Driver Current (mA)	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Face
Dali - Black - Microwave - Emergency														
PC15-A3C-23B	Portchester-Clear-15W-LED-AC-6K-Dali-MW-E3-Black	LED	1,782	15	CW	6K	Ra>70	220-240	350	1,426	95	4.1	Black	Clear
PC15-A3N-23B	Portchester-Clear-15W-LED-AC-4K-Dali-MW-E3-Black	LED	1,782	15	NW	4K	Ra>70	220-240	350	1,426	95	4.1	Black	Clear
PC15-A3W-23B	Portchester-Clear-15W-LED-AC-3K-Dali-MW-E3-Black	LED	1,508	15	WW	3K	Ra>80	220-240	350	1,206	80	4.1	Black	Clear
Dali - Grey - Microwave - Emergency														
PC15-A3C-23G	Portchester-Clear-15W-LED-AC-6K-Dali-MW-E3-Grey	LED	1,782	15	CW	6K	Ra>70	220-240	350	1,426	95	4.1	Grey	Clear
PC15-A3N-23G	Portchester-Clear-15W-LED-AC-4K-Dali-MW-E3-Grey	LED	1,782	15	NW	4K	Ra>70	220-240	350	1,426	95	4.1	Grey	Clear
PC15-A3W-23G	Portchester-Clear-15W-LED-AC-3K-Dali-MW-E3-Grey	LED	1,508	15	WW	3K	Ra>80	220-240	350	1,206	80	4.1	Grey	Clear

Legend: **Std** = Standard. **3K** = Warm White (3000K). **4K** = Neutral White (4000K). **6K** = Cool White (6000K). **WW** = Warm White. **NW** = Neutral White. **CW** = Cool White.